


## TC66

**Standby power : 66KVA/52KW**

**Prime power : 60KVA/48KW**

### Standard features

- Engine : CUMMINS , 4BTA3.9-G2
- Charge alternator : 24V
- Governor : Electrical
- Generator : STAMFORD , UCI224E
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

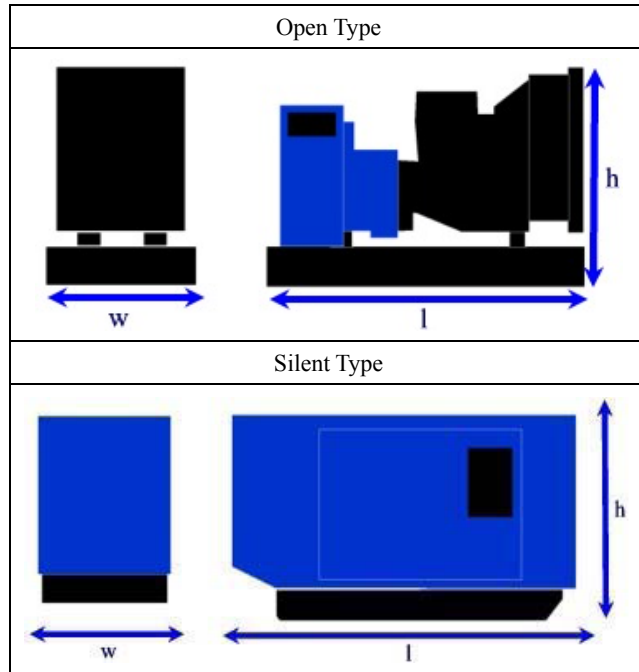

### Weight and Dimensions

GEN-Set	Dimension ( L×W×H )	Weight
Open Type	1820mm×820mm×1350mm	916 Kg
Silent Type	2396mm×1056mm×1723mm	1305 Kg

### Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	94	66/52	60/48

### Engine Data

Manufacturer/Model	CUMMINS 4BTA3.9-G2 4-cycle
Cylinder /Arrangement	4 / L
Displacement	3.9 L
Bore and Stroke	102 mm×120 mm
Compression ratio	16.5 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	55 KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrical

### Exhaust System

Exhaust gas flow	166 L/S
Exhaust temperature	475°C
Max back pressure	76mmHg

## Fuel System

Fuel consumption 100% (of the Prime Power)	11 L / h
--	----------

## Oil system

Total oil capacity w/filters	10.9 L
------------------------------	--------

## Air intake

Engine air flow	248m <sup>3</sup> / h
-----------------	-----------------------

## Coolant System

Radiator & engine capacity	17.9 L
Max water temperature	105°C
Thermostat	82-94°C

## Generator Data

Manufacturer / Type	STAMFORD UCI224E
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise protection	H / H IP23

## Control panel



### Specifications :

Frequency meter , Ammeter , Voltmeter , Alarms and faults  
Oil pressure , water temperature , No start-up , Overspeed ,  
Min/max battery voltage , Low fuel level , Emergency stop

### Engine parameters:

Hours counter , Oil pressure , water temperature